

# LUMIÈRE CONFIGURATION G (NON-BACKLIT)

LUMIÈRE LIGHT WALL  
PRODUCT CODE: LLWGG



On frame On graphic

## PRODUCT DESCRIPTION

Introducing the Lumiere Light Wall! A combination of innovative silicone-edge graphics and RPL fabric pop ups offers an easier and more cost effective SEG option. This SEG style display has the depth of the RPL so you can expose more of your message using endcap graphics. The Lumiere shrinks down in size - simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabric graphics. Setup can be done by 1 person and in 5-10 minutes. SEG portability is easy and stylish.

<b>DISPLAY DIMENSION</b>	207"W x 89"H x 103"D
<b>GRAPHIC DIMENSIONS</b>	4x3: 117.5"W x 88"H - Qty.2 3x3: 88"W x 88"H - Qty.4 Endcaps: 13.375"W x 88"H - Qty.3

## GRAPHIC MATERIAL

Stretch Fabric

## GRAPHIC FINISHING

SEG Finishing (Silicone Edge Graphic)

## DISPLAY CONSTRUCTION

Aluminum Frame

## SHIPPING WEIGHTS & DIMENSIONS

Shipping Weight (3 boxes)	Qty.2 - 3x3: 28lbs (frame only) 36lbs (with graphics)
	Qty.1 - 4x3: 32lbs (frame only) 40lbs (with graphics)
Shipping Dimensions (3 boxes)	Qty.3 - 34"L x 14"W x 9"H

## GRAPHIC TURN AROUND TIME


3 business days after proof approval

## AVAILABLE ACCESSORIES

Lumiere LED Lights 150w (Black & Silver)	Lumiere Front Lit LED Lights (Black & Silver)
T135 LED Light	La Caja Case
Tahoe Case	

## AVAILABILITY

CA and PA

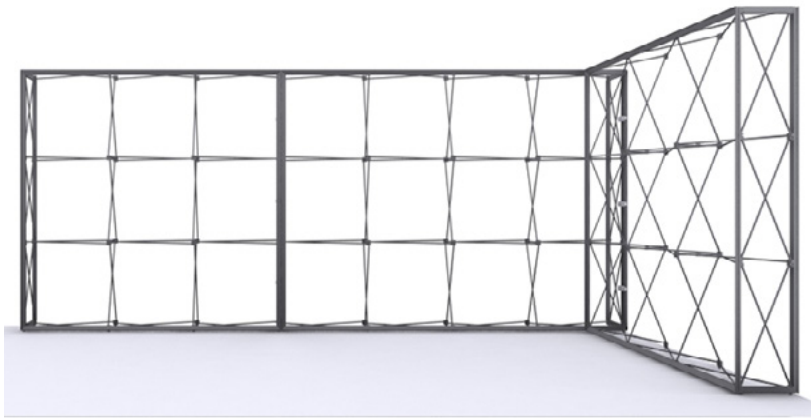

L Link Connector



Straight Connector

# LUMIÈRE CONFIGURATION G (NON-BACKLIT)

LUMIÈRE LIGHT WALL  
PRODUCT CODE: LLWGG



On frame On graphic

## PARTS LIST



Qty.2 - 7.5' x 7.5' Frame



Qty.1 - 10' x 7.5' Frame



Qty.4 - 4 Section Channel Bars



Qty.20 - 3 Section Channel Bars



Qty.6 - Endcap Channel Bar



Qty.3 - L Link Connector



Qty.6 - Straight Connector



Qty.3 - Channel Bar Bags



Qty.3 - Carry Bag

# LUMIÈRE CONFIGURATION G (NON-BACKLIT)

LUMIÈRE LIGHT WALL  
PRODUCT CODE: LLWGG



On frame On graphic

## ACCESSORIES



La Caja Case



Tahoe Case



150w Black Light



150w Silver Light



Front Lit LED Black Light



Front Lit LED Silver Light



T135 LED Light

# LUMIÈRE CONFIGURATION G (NON-BACKLIT)

LUMIÈRE LIGHT WALL  
PRODUCT CODE: LLWGG




On frame On graphic

## SET UP INSTRUCTIONS


### Set Up Pop Up Frame



a. Place frame with the adjustable feet facing down.




b. Expand the frame.

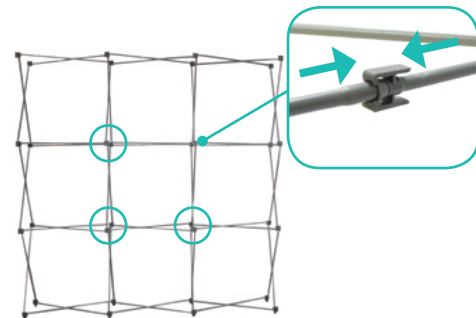


c. Close frame by pushing the outside of the frame until male and female ends connect.

### Insert Channel Bars

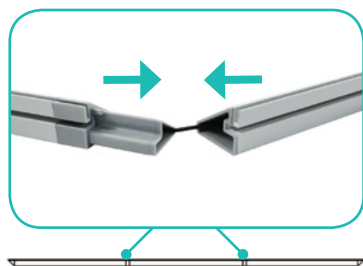

a. Expand each channel bar. Follow bungee to connect.

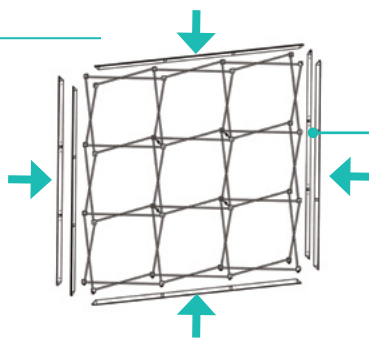

b. Attach channel bars to frame.



c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom end caps on each side of the frame.

### Install Graphic



a. In each corner, insert the silicone edge beading into the groove.




b. Then insert the remainder of the beading.



c. Repeat graphic installation on the end caps.



### Optional Accessories

#### Light Bracket:



a. Snap the LED Light Bracket on top of the frame. Then slide the LED Light onto the bracket.

#### Stabilized Feet:





a. From the back, lift frame and insert adjustable feet onto stabilized feet. Then slide stabilized feet toward and insert onto the adjustable feet.

## SET UP INSTRUCTIONS

(CONFIGURATION G)

### L Link Connection (Return Wall)

Adjoin the 3x3 and 4x3 frames at a 90° angle. Starting from behind, pull the 4x3 graphic away to make space for the L Connector. Place the L Connector onto the channel bars of both frames. Turn the dial to the left to lock the L Connector into place. Repeat for each vertical section (3 total).

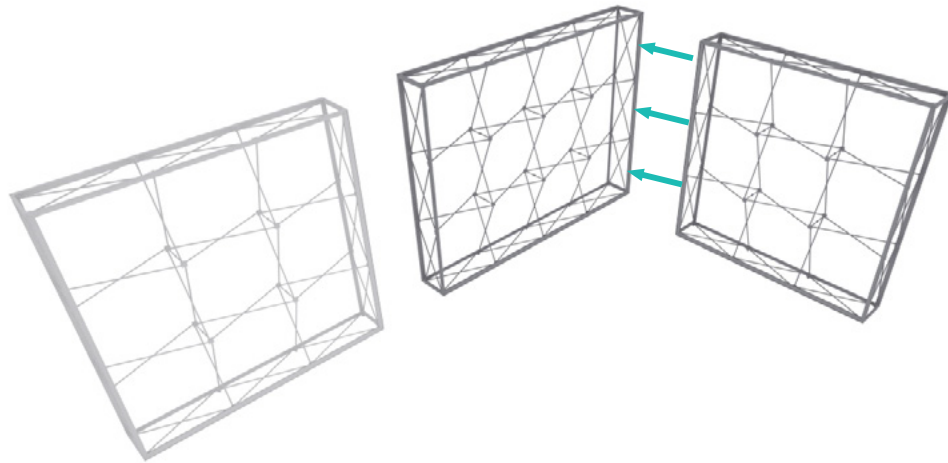

### Straight Connection (Side Extension)

Adjoin both 3x3 and 4x3 frames, side by side. Place a straight connector directly in the middle (outside channel bar of each frame) of both frames. Turn the dial to the left to lock in place. Repeat for front and back vertical sections (6 total).

